


Änderung der DHCP-Einstellungen für Modell: C20i (Hersteller: TP-Link)

1. Verbindung mit dem Router herstellen (über W-LAN oder LAN)

2. Geben Sie in einem beliebigen Browser folgende Adresse ein:

 <http://tplinkwifi.net>


3. Anschließend gelangen Sie auf die Herstellerseite von TP-LINK und Sie können sich Anmelden

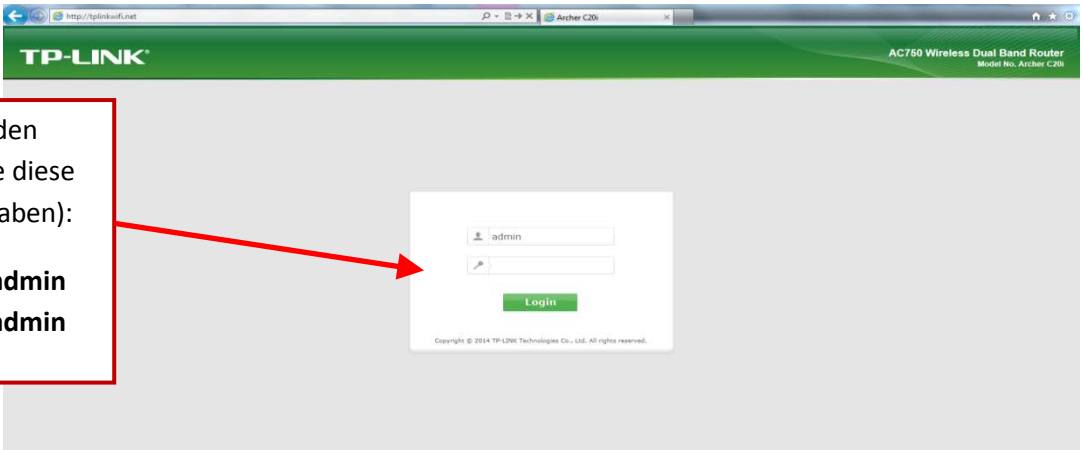

Login mit folgenden Daten (sofern Sie diese nicht geändert haben):

User Name: **admin**
Kennwort: **admin**

4. Einstellungen ändern

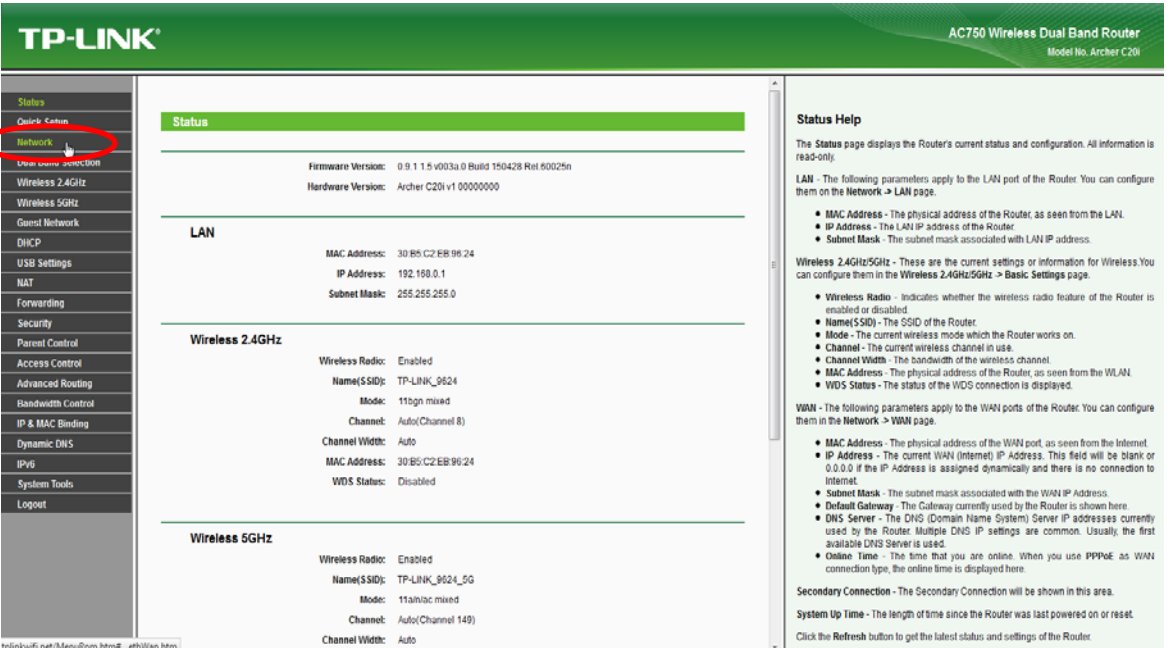

Den Menüpunkt „Network“ öffnen.

Status

Firmware Version: 0.9.1.1.5.v003a.0 Build 150428 Rel.60025n
Hardware Version: Archer C20i v1.00000000

LAN

MAC Address: 30:B5:C2:EB:96:24
IP Address: 192.168.0.1
Subnet Mask: 255.255.255.0

Wireless 2.4GHz

Wireless Radio: Enabled
Name (SSID): TP-LINK_0624
Mode: 11bgn mixed
Channel: Auto(Channel 8)
Channel Width: Auto
MAC Address: 30:B5:C2:EB:96:24
WDS Status: Disabled

Wireless 5GHz

Wireless Radio: Enabled
Name (SSID): TP-LINK_0624_5G
Mode: 11a/n/ac mixed
Channel: Auto(Channel 149)
Channel Width: Auto

Status Help

The Status page displays the Router's current status and configuration. All information is read-only.

LAN - The following parameters apply to the LAN port of the Router. You can configure them on the Network > LAN page.

- **MAC Address** - The physical address of the Router, as seen from the LAN.
- **IP Address** - The LAN IP address of the Router.
- **Subnet Mask** - The subnet mask associated with LAN IP address.

Wireless 2.4GHz/5GHz - These are the current settings or information for Wireless. You can configure them in the Wireless 2.4GHz/5GHz > Basic Settings page.

- **Wireless Radio** - Indicates whether the wireless radio feature of the Router is enabled or disabled.
- **Name (SSID)** - The SSID of the Router.
- **Mode** - The current wireless mode which the Router works on.
- **Channel** - The current wireless channel in use.
- **Channel Width** - The bandwidth of the wireless channel.
- **MAC Address** - The physical address of the Router, as seen from the WLAN.
- **WDS Status** - The status of the WDS connection is displayed.

WAN - The following parameters apply to the WAN ports of the Router. You can configure them in the Network > WAN page.


- **MAC Address** - The physical address of the WAN port, as seen from the Internet.
- **IP Address** - The current WAN (Internet) IP Address. This field will be blank or 0.0.0.0 if the IP Address is assigned dynamically and there is no connection to Internet.
- **Subnet Mask** - The subnet mask associated with the WAN IP Address.
- **Default Gateway** - The Gateway currently used by the Router is shown here.
- **DNS Server** - The DNS (Domain Name System) Server IP addresses currently used by the Router. Multiple DNS IP settings are common. Usually, the first available DNS Server is used.
- **Online Time** - The time that you are online. When you use PPPoE as WAN connection type, the online time is displayed here.

Secondary Connection - The Secondary Connection will be shown in this area.

System Up Time - The length of time since the Router was last powered on or reset.

Click the Refresh button to get the latest status and settings of the Router.

Menüpunkt „WAN“
Einstellungen öffnen



TP-LINK®

AC750 Wireless Dual Band Router
Model No. Archer C20i

A screenshot of the WAN Settings page. The 'Connection Type' dropdown menu is open, showing 'Dynamic IP' selected. The 'Save' button is circled in red. The page includes fields for IP Address, Subnet Mask, and Gateway, along with 'Renew' and 'Release' buttons. A sidebar on the left contains various settings categories. A 'WAN Help' section on the right provides detailed instructions for different connection types.

WAN Settings

Connection Type: **Dynamic IP** Detect

IP Address: _____

Subnet Mask: _____

Gateway: _____

Renew Release

Save

Advance

WAN Help

WAN Connection Type:

If your ISP is running a DHCP server, select the **Dynamic IP** option.

If your ISP provides a static or fixed IP Address, Subnet Mask, Gateway and DNS setting, select the **Static IP** option.

If your ISP provides a PPPoE connection, select PPPoE option.

If your ISP provides a PPPoE connection, please select PPPoE option.

If your ISP provides BigPond Cable (or Heart Beat Signal) connection, please select **BigPond Cable** option.

If your ISP provides L2TP connection, please select **L2TP** option.

If your ISP provides PPTP connection, please select **PPTP** option.

If you don't know how to choose the appropriate connection type, click the **Detect** button to allow the Router to automatically search your Internet connection for servers and protocols. The connection type will be reported when an active Internet service is successfully detected by the Router. This report is for your reference only. To make sure the connection type your ISP provides, please refer to the ISP. The various types of Internet connections that the Router can detect are as follows:

- **PPPoE** - Connections which use PPPoE that requires a user name and password.
- **Dynamic IP** - Connections which use dynamic IP address assignment.
- **Static IP** - Connections which use static IP address assignment.

IP Address - The IP address assigned by your ISP dynamically.

Subnet Mask - The subnet mask assigned by your ISP dynamically.

Default Gateway - The default gateway assigned dynamically by your ISP.

Click the **Renew** button to renew the IP parameters from your ISP.

Click the **Release** button to release the IP parameters from your ISP.

MTU Size(in bytes) - The normal MTU (Maximum Transmission Unit) value for most Ethernet networks is 1500 Bytes. For some ISPs you need to modify the MTU. But this is rarely required, and should not be done unless you are sure it is necessary for your ISP connection.

„Connection Type“
Dynamic IP (DHCP)
auswählen und sichern!